




# Double-sided Tape

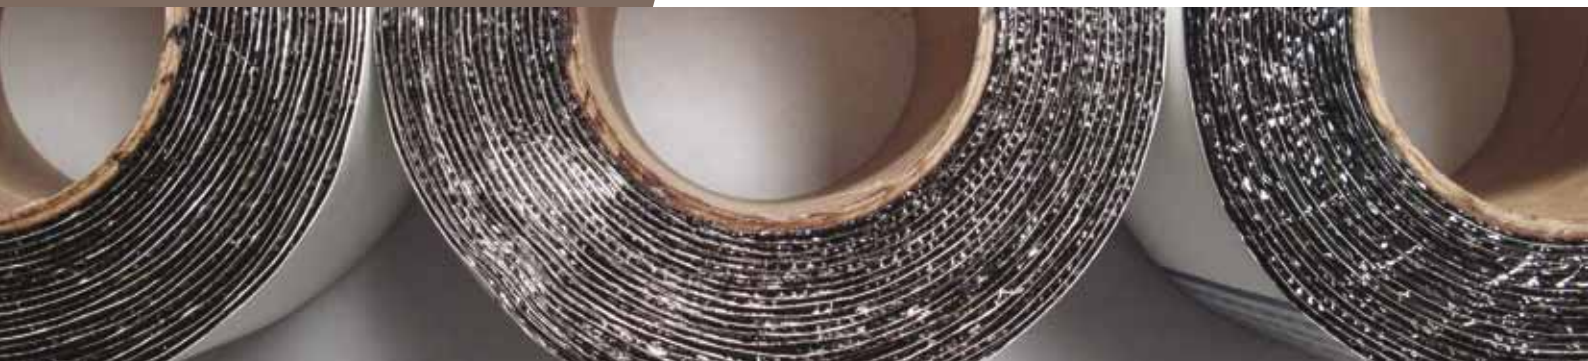

## Mastic sealing tape

Double-sided Tape is a 1,5 mm tape suited for side- and end-lap sealing of the Tilesafe membrane. Proudly manufactured locally!

### Uses

**Double-sided Tape** is used to form waterproof joints at wall-to-wall, wall-to-floor junctions and beneath all adjacent and end butt joints of the Tilesafe membrane.

### Technical data

Properties	Test Method	Metric
Adhesion – to primed steel	ASTM D1000 24hrs	2,5 N/mm
Adhesion – to self	ASTM D1000 24hrs	2,5 N/mm
Resistance to Acids, Alkalis & Salts		Excellent
Temperature range – application		10°C to 35°C
Temperature range – service		5°C to 70°C
Roll length		7,5 m
Roll width		150 mm
Thickness – adhesive		1500 µm
Thickness – total		1500 µm
Weight		1,5 kg/m <sup>2</sup>
Recommended Primer		Primer D

Specifications are subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.



Manufactured in SA for SA conditions

### Application

- Surfaces should be clean, dry and dust free.
- Prime with **Primer D**.
- Apply 150 mm wide **Double-sided Tape** to the floor along the centre line where each side and end lap butt joints will occur.
- Remove the underside release paper and fix tape to the floor.
- Leave the top plastic release film in place until the Tilesafe membrane is applied.
- The Tilesafe membrane must centrally overlap the **Double-sided Tape** by 75 mm on each side.

**Note:** If silicone sealant is to be used between tiles at corners, etc it is important to ensure that it does not make direct contact with the **Double-sided Tape**.

### Safety

- Normal hygiene procedures
- Wash hands thoroughly with soap and water or a proprietary hand-cleaner prior to eating or smoking
- Launder contaminated clothing, gloves, etc

### Storage

- Store in original containers in a cool, dry place.
- Maximum shelf life – 6 months.

Version 001-201203

Disclaimer: The use of this product is beyond the manufacturer's control and liability is restricted to the replacement of material proven faulty. The manufacturer is not responsible for any loss or damage arising from incorrect usage. Specifications are subject to change without prior notice.

Available from Waterproofing Centres countrywide

[www.waterproofingcentre.co.za](http://www.waterproofingcentre.co.za)

#### Cape Town

Tel 021 448 7880  
Fax 021 448 7897

#### Gauteng

Tel 011 608 0317  
Fax 011 608 0347

#### KwaZulu-Natal

Tel 031 569 3963  
Fax 031 569 1849

#### Port Elizabeth

Tel 041 365 2936  
Fax 041 365 6475

#### East London

Tel 043 722 5676  
Fax 043 722 5676

#### Brackenfell

Tel 021 981 8343

#### George

Tel 044 874 3905  
Fax 044 874 3907

#### Margate

Tel 039 312 2764  
Fax 039 312 2673

#### Nelspruit

Tel 013 752 4409  
Fax 013 752 6556

#### email

assist@  
waterproofingcentre.co.za