




# Uniflash with tails

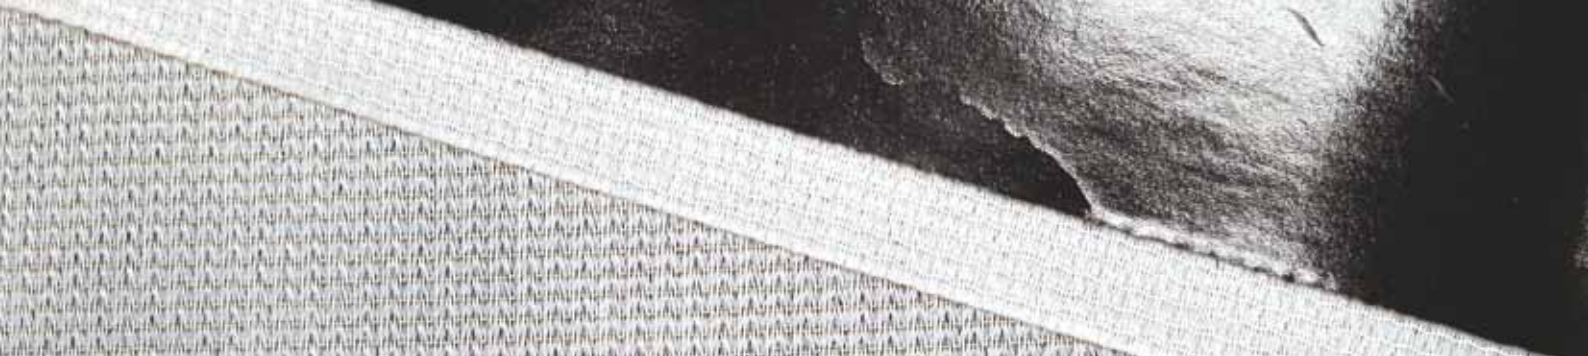

## Elastomeric waterproof membrane

Uniflash with Tails is a high performance product comprising of an adhesive polymer modified compound that has been laminated to a woven polyester membrane and interleaved with a removable release film. Proudly manufactured locally!

### Uses

- Flashings and profile copings on all types of roofs
- Side and end laps on asbestos and metal roofs
- General roof repairs
- Parapet wall capping

### Features

- Light in weight and easy to handle
- A guaranteed pinhole free system
- Controlled coating thickness
- Excellent conformability
- Quick and easy application
- Easily maintained for maximum service life

### Application

- Apply to properly prepared and primed surfaces.
- Fully saturate the polyester membrane with the selected high quality top coat system to suit the end requirements.
- This application process will provide an impervious waterproofing membrane capable of absorbing normal substrate movements without cracking or loss of adhesion.

### Standard sizes

Tape Width	Roll Length
100 mm	15 m
150 mm	15 m
200 mm	15 m

Tape Width	Roll Length
225 mm	15 m
300 mm	15 m

### Technical data

Properties	Test Method	Metric
Elongation at break	ASTM D1000	45 %
Adhesion – to primed steel	ASTM D1000	2,5 N/mm
Adhesion – to self	ASTM D1000	2 N/mm
Resistance to Acids, Alkalis & Salts		Excellent
Temperature range – application		10°C to 35°C
Temperature range – service		5°C to 70°C
Thickness – total		1250 µm
Weight		1,25 kg/m <sup>2</sup>
Recommended Primer		Primer D

Specifications are subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.

### Safety

- Normal hygiene procedures.
- Wash hands thoroughly with soap and water or a proprietary hand-cleaner prior to eating or smoking.
- Launder contaminated clothing, gloves, etc.

### Storage

- Store in original containers in a cool, dry place.
- Maximum shelf life – 6 months.



Manufactured in SA for SA conditions

version 001-201203

Disclaimer: The use of this product is beyond the manufacturer's control and liability is restricted to the replacement of material proven faulty. The manufacturer is not responsible for any loss or damage arising from incorrect usage. Specifications are subject to change without prior notice.

Available from Waterproofing Centres countrywide

[www.waterproofingcentre.co.za](http://www.waterproofingcentre.co.za)

#### Cape Town

Tel 021 448 7880  
Fax 021 448 7897

#### Gauteng

Tel 011 608 0317  
Fax 011 608 0347

#### KwaZulu-Natal

Tel 031 569 3963  
Fax 031 569 1849

#### Port Elizabeth

Tel 041 365 2936  
Fax 041 365 6475

#### East London

Tel 043 722 5676  
Fax 043 722 5676

#### Brackenfell

Tel 021 981 8343

#### George

Tel 044 874 3905  
Fax 044 874 3907

#### Margate

Tel 039 312 2764  
Fax 039 312 2673

#### Nelspruit

Tel 013 752 4409  
Fax 013 752 6556

#### email

assist@  
waterproofingcentre.co.za