

## TECHNICAL DATA

### STANDARD SIZES :

Length	Width
15 m	100 mm
15 m	150 mm
15 m	200 mm
15 m	225 mm
15 m	250 mm
15 m	300 mm
15 m	350 mm
15 m	400 mm
15 m	450 mm
15 m	500 mm
15 m	600 mm

### PRESENTATION :

	Test Methods	Metric
Thickness – backing	ASTM D1000	300 µm
Thickness – adhesive	ASTM D1000	1200 µm
Thickness – total	ASTM D1000	1500 µm
Weight		1,5 kg/m <sup>2</sup>

### PHYSICAL PROPERTIES :

	Test Methods	Metrics
Adhesion – to primed steel	ASTM D1000	2,5 N/mm
Adhesion – to self	ASTM D1000	2,5 N/mm
Resistance to acids, alkalis & salts		Excellent
Temperature range – application		10°C to 35°C
Temperature range – service		5°C to 65°C
Recommended primer		Primer D
Elongation at break	ASTM D1000	15%

## Overview

Uniflash is a flexible, self-adhesive, elastomeric membrane, with a stitched geofabric on top, which is suitable to be coated with most exterior acrylic paints or our WPC Geoflex acrylic paint.



## Fields of Application


A general purpose waterproofing membrane for exposed applications including flashings for parapets. Uniflash is a locally manufactured product specifically designed to suit our unique climate.

These attributes make Uniflash ideal for:

- Counter flashing
- Gutter sealing
- Flat roof repairs
- Valley linings
- Roof sheet laps
- Covering drive screws
- Counter flashing for torch applied membranes
- Counter flashing for cold applied membranes

## Features

- Fast and easy application
- No heating or drying
- Conformable
- NOTE: to receive top coating of acrylic PVA

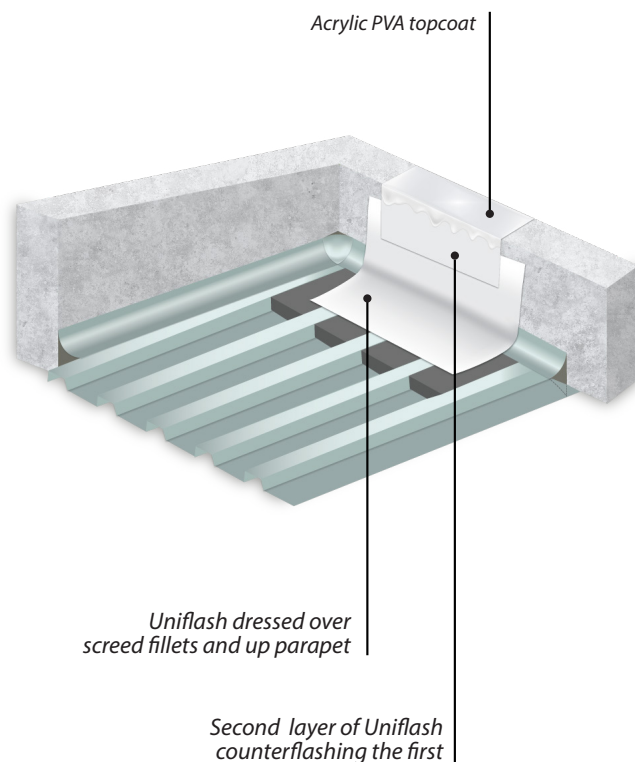

Specifications are subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.

## INSTALLATION INSTRUCTIONS

### Surface Preparation

- The substrate is to be clean, dry and free of any dust, grease, oils and loose debris. It is to be of smooth and even condition and free of protrusions and voids.
- Prime all surfaces with **WPC Primer D**.


### Considerations for Application

\* Please consult with your nearest WPC branch to confirm the specification and obtain recommendations regarding complimentary waterproofing products.

**NOTE: Product is not designed for permanent UV exposure. Paint as soon as possible after installing.**

### Storage and Safety

- **Uniflash** is to be stored in original containers in a cool, dry place. Max shelf life - 6 months.
- Refer to full MSDS for additional information.

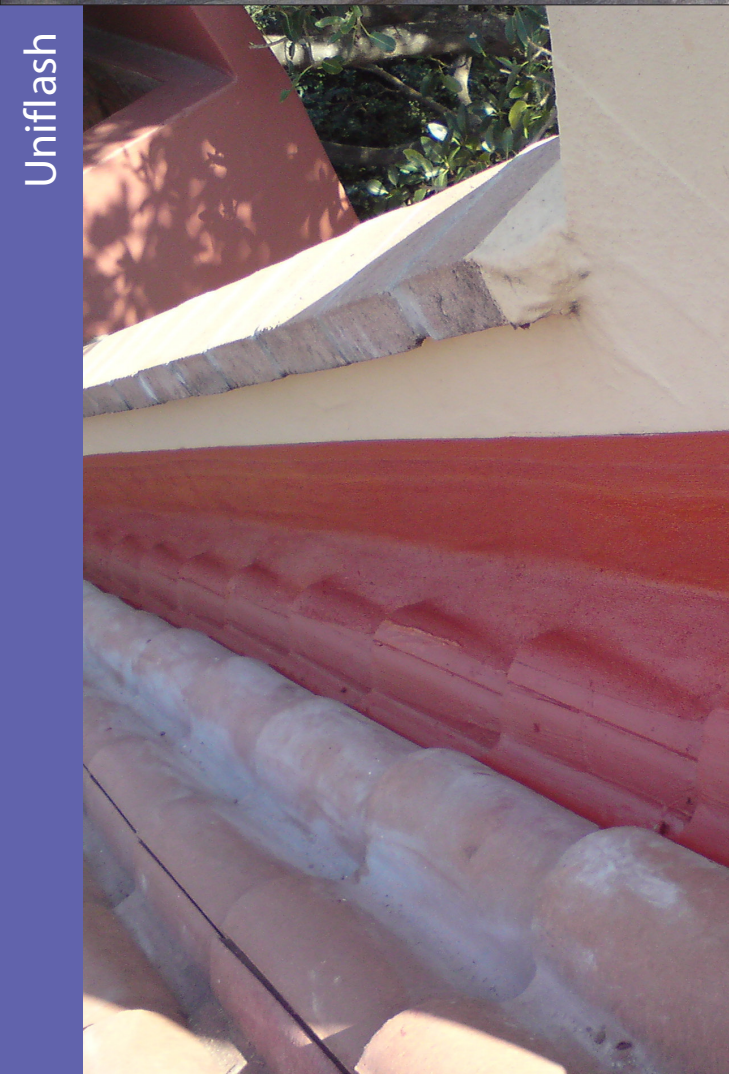

Uniflash



Disclaimer: The use of this product is beyond the manufacturer's control and liability is restricted to the replacement of material proven faulty. The manufacturer is not responsible for any loss or damage arising from incorrect usage. Specifications are subject to change without prior notice.

[www.waterproofingcentre.co.za](http://www.waterproofingcentre.co.za)

[www.derbigum.co.za](http://www.derbigum.co.za)

#### Western Cape

**Cape Town**  
**Somerset West**  
**George**

021 448 7880  
021 854 4760  
044 874 3905

#### KZN

**Durban**

031 569 1843

#### Gauteng

**Linbro**  
**Pretoria**  
**Alrode\***

011 608 0317  
012 803 1552  
011 868 1028

#### Mpumalanga

**Nelspruit**

013 752 4409

#### Eastern Cape

**Port Elizabeth**  
**East London**

041 365 2936  
043 722 5676

#### "Watertight Solutions"

Email Us: [assist@waterproofingcentre.co.za](mailto:assist@waterproofingcentre.co.za)  
[assist@derbigum.co.za](mailto:assist@derbigum.co.za)  
Hotline: 0861 WPC 000 / 0861 972 000

Revision 2018-08-01

\*manufacturing & export