



Roofcote



Bituminous aluminium paint

Roofcote is a *locally manufactured* high quality decorative and reflective, bitumen based aluminium paint.

Fields of application

Roofcote solar reflective roof aluminium paint may be applied to a wide range of substrates including metal and bitumen coatings together with roofing felt. Its bright aluminium colour gives good heat- and light-reflective properties, ideal for reducing solar heat pick-up on dark roofs, tanks and similar surfaces.

- Modified roof membranes
- Metal roofs
- Walls and parapets

Features

- UV resistant
- Highly reflective
- Easy to apply

Coverage	8 to 10 m ² per litre per coat
Cleaning	Clean equipment with white spirits
Drying time at 25°C	Touch dry - 1 hour. Hard dry - 2 hours.

Technical data

Density	0,985 g/cm ³
Wet material flash point	38°C
Dilution	not recommended
Drying time - touch dry	1 hour
Drying time - hard dry	2 hours
Overcoating time at 25°C	minimum of 2 hours
Recommended no. of coats	2
Toxicity	non-toxic
Weather resistance	weathers well, but dulls with age
Water resistance	not recommended for immersion conditions
Solvent resistance	will not withstand solvent spillage
Chemical resistance	dry film attacked by both acids and alkalis

Specifications are subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.

continued overleaf...



Manufactured in SA for SA conditions

version 001-201203

Disclaimer: The use of this product is beyond the manufacturer's control and liability is restricted to the replacement of material proven faulty. The manufacturer is not responsible for any loss or damage arising from incorrect usage. Specifications are subject to change without prior notice.

Available from Waterproofing Centres countrywide

www.waterproofingcentre.co.za

Cape Town

Tel 021 448 7880
Fax 021 448 7897

Gauteng

Tel 011 608 0317
Fax 011 608 0347

KwaZulu-Natal

Tel 031 569 3963
Fax 031 569 1849

Port Elizabeth

Tel 041 365 2936
Fax 041 365 6475

East London

Tel 043 722 5676
Fax 043 722 5676

Brackenfell

Tel 021 981 8343

George

Tel 044 874 3905
Fax 044 874 3907

Margate



Tel 039 312 2764
Fax 039 312 2673

Nelspruit

Tel 013 752 4409
Fax 013 752 6556

email

assist@
waterproofingcentre.co.za

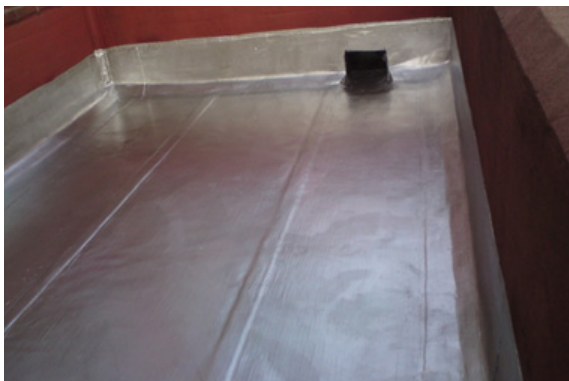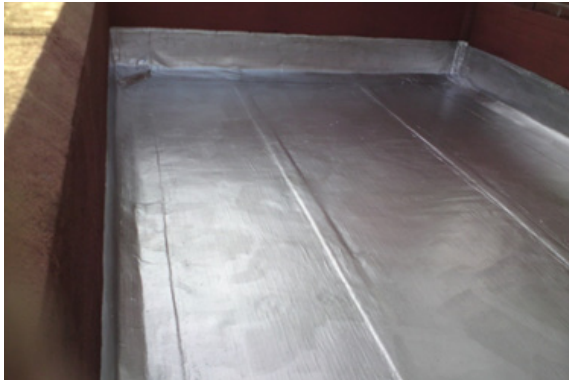

Precautions

- Do not apply if surface is less than 2°C above dew point.
- Roofcote contains a flammable solvent - all normal precautions against fire should be taken during storage and use.
- Keep away from sources of ignition.

Safety

- Flammable
- Ensure adequate ventilation.
- Do not smoke or use flame during application.
- If Roofcote comes into contact with eyes, rinse with plenty of clean water and seek medical attention.

Storage

- Store in original containers in a cool, dry place.
- Maximum shelf life –12 months (under normal conditions).

Surface preparation

As with all surface coatings, good preparation is of paramount importance to the success and long-life of the system.


- Ensure that the surface to be treated is dry and sound, free of loose, dusting or flaking particles and free from contaminants such as grease and fungus.
- New bituminous surfaces should weather for 8 weeks before coating.

Application

- Roofcote should be stirred thoroughly before and during use to ensure even distribution of the aluminium pigment.
- If moss or lichen is present, this should be removed and the surface treated with Fungicide in accordance with its application instructions before proceeding.

*NOTE: Roofcote must be stirred well before use.
Continue to stir thoroughly during use.*

- Roofcote can be applied by brush or roller.
- If the finishing paint is to be applied over existing bitumen coatings it is important that such treatments are thoroughly dry (ie applied after at least 14 days). Take care to see that brushing is kept to a minimum to prevent softening of the substrate.
- Two coats of finishing paint is recommended. The first coat must be allowed to dry thoroughly before the second coat is applied.

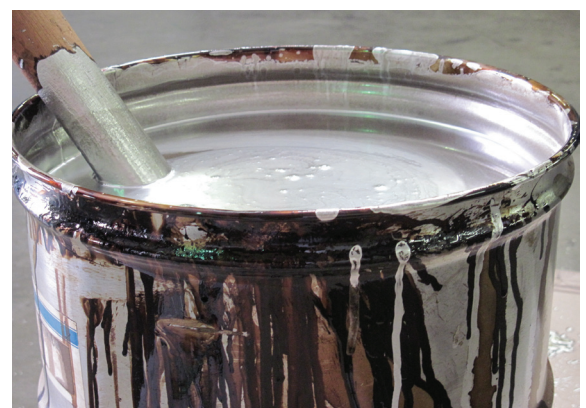

version 001-201203

Disclaimer: The use of this product is beyond the manufacturer's control and liability is restricted to the replacement of material proven faulty. The manufacturer is not responsible for any loss or damage arising from incorrect usage. Specifications are subject to change without prior notice.



Manufactured in SA
for SA conditions

Available from Waterproofing Centres countrywide

www.waterproofingcentre.co.za

Cape Town

Tel 021 448 7880
Fax 021 448 7897

Gauteng

Tel 011 608 0317
Fax 011 608 0347

KwaZulu-Natal

Tel 031 569 3963
Fax 031 569 1849

Port Elizabeth

Tel 041 365 2936
Fax 041 365 6475

East London

Tel 043 722 5676
Fax 043 722 5676

Brackenfell

Tel 021 981 8343

George

Tel 044 874 3905
Fax 044 874 3907

Margate

Tel 039 312 2764
Fax 039 312 2673

Nelspruit

Tel 013 752 4409
Fax 013 752 6556

email

assist@
waterproofingcentre.co.za